

EST3140 Pressure Transducer for AC/Refrigerant

- ✓ Sensing Element: Ceramic Piezo-Resistive (Thick Film)
- ✓ Pressure type: Gauge
- ✓ Range: -1-1bar...50bar
- ✓ Accuracy: ±0.5%F.S
- ✓ Stability: 0.5%F.S/Year(typical),
- ✓ Working Temperature: -40-125°C
- ✓ Compensation Temperature: -10-70°C
- ✓ Signal Output: 4~20mA, 0.5~4.5V
- ✓ Power supply: 8~45Vdc, 5V(Ratio)
- ✓ Electrical Connection: Packard
- ✓ Process Connection: 7-16 20UNF
- ✓ OEM: Available



Applications

Compressor | Air conditioning unit | Refrigeration equipment

Product Introduction

EST3140 is Ceramic Thick Film Piezo-resistive on Al₂O₃ 96%, the compact design and easy to install features make it widely used for water-cooled screw units, ground source heat pumps, freezers, chillers, ice machines, etc. Its unique anti-condensation design also plays a pressure protection role for the safe and efficient operation of the equipment.


Electrical Connections and Dimensional Drawings

Electrical Specification				
Current Type(2-wire)	4-20mA	11V-36VDC	Resistive Load	<=50(U-11)
Voltage Type (3-wire)	0-5V	6V-36VDC		>10k
I2C(4-wire)	I2C	3.0V-5.5VDC		>10k
Load resistance(R_L): Current type(2-wire); $R \leq (U-11)/0.02-RD$ (U: power voltage; RD: Internal resistance of cable)				
Current consumption:				
<ul style="list-style-type: none"> ● Current type(2-wire): < 23mA ● Voltage type (3-wire): <5mA 		<ul style="list-style-type: none"> ● I2C(4-wire): <1.3mA (Optional Low Consumption: <5 μ A) 		
Accuracy Specification				
Reference Accuracy (°C.)	0.5			
Non-linearity	<=0.4%			
Hysteresis	<=0.1%			
Repeatability	<=0.1%			


Long-term Stability (%FS)	<=0.5%		
	<i>Including Linearity Hysteresis+ Repeatability from zero; Square root output accuracy=1.5X of the linear</i>		
Temperature. Drift @ Zero	<=0.03%	<=0.05% (typical)	
Sensitivity. Drift @ Zero	<=0.03%	<=0.05%(typical)	
	<i>Reference Temperature: 20~25 °C; relative humidity: 45%RH~75%RH; Voltage: 24V ±0.24V; 5V ±0.05V</i>		
Environment & Working Conditions			
Compensation Temperature	-10°C ~ 70°C; -40°C ~ 85°C (optional)		
Measuring Temperature	-40°C ~ +85°C		
Storage Temperature	-40°C ~ +125°C		
	<i>Note: The medium under test freezing can cause irreparable damage to the product; when the pressure transmitter is working normally, the medium under test should not solidify.</i>		
Electrical Connection	Packard		
Process Connection	7/16-20UNF		
Ingress Protection	IP65 (IP67)		
Insulation	>100MΩ @250VDC		
Atmospheric Pressure	86kPa~106kPa		
Vibration	10gRMS, (@20Hz~2000Hz)		
Shock	100g/11ms		
Response time	<1ms (@ 90%FS)		
Life-Span/usage	>10 million load cycles (within the measuring range)		


Structure Size Outline Dimension (mm)

The image below shows the typical product structure. For other shapes and structures, please contact us for customization.

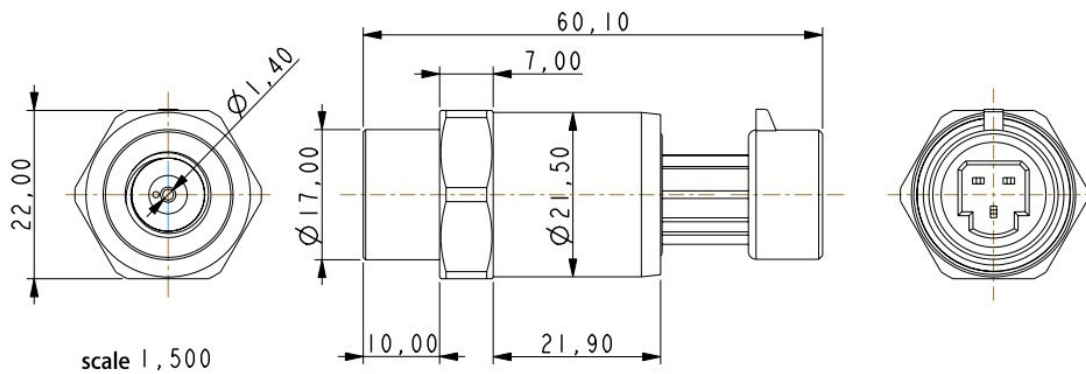

Material & dimension for wires/cable

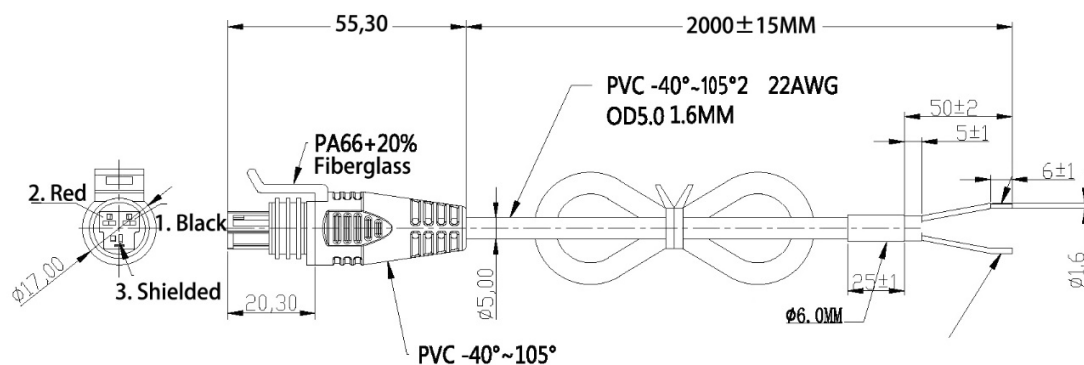

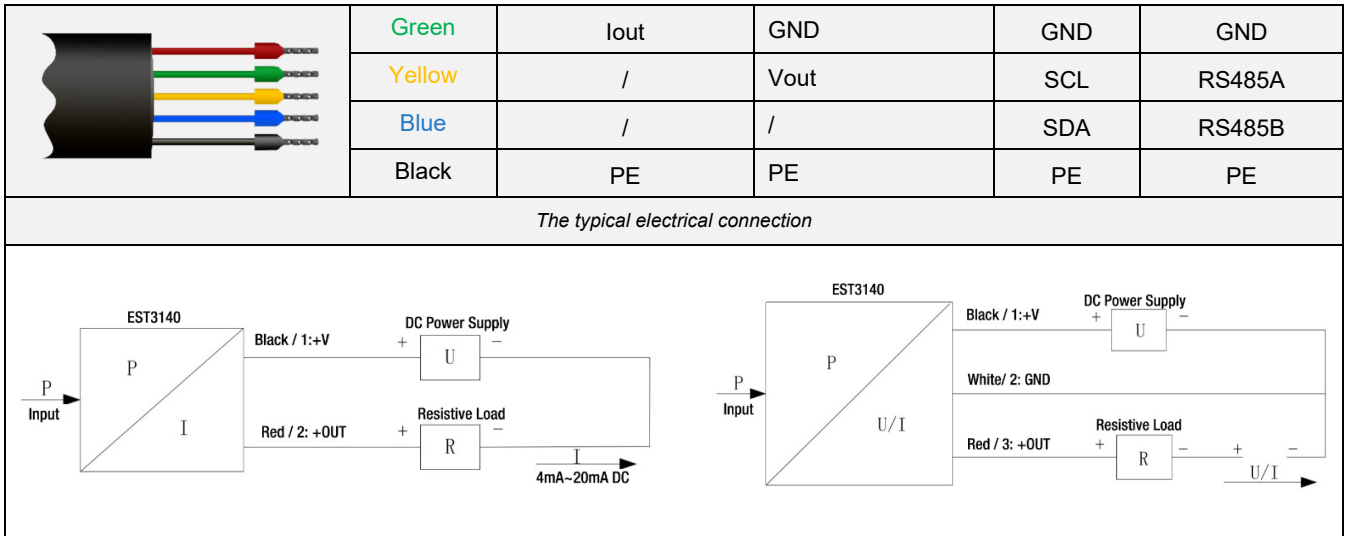

Ordering Procedure

EST3140	Ceramic Piezoresistive Pressure Transmitter (Thick Film)					
	Cod	Pressure Type				
	G	Gauge Pressure				
		Code	Power Supply			
		P1	3.0-5.5VDC			
		P2	6-36VDC			
		P3	11-36VDC			
		P5	Others			
			Cod	Output Signal		
			C	4mA~20mA		
			V3	0V~5V		
			V4	0.5-4.5V		
			Code	Electrical Connections		
			L2	Packard		
				Code	Process Connections	
				01	7/16-20UNF	
				11	Others (please indicate)	
				Code	Cable Length	
				0.5	0.5m	
				1	1m	
				2	2m	
EST340	G	P1	C	L3	01	Fa
<ul style="list-style-type: none"> ➤ When choosing a product, please pay attention to the compatibility between the tested medium and the casing. For media compatibility issues, you can consult our company. ➤ When choosing a digital display product, the working environment temperature range for the display header is -30℃ to 60℃, and the product power supply should not be less than 15VDC. ➤ Sealing measures are adopted at the interface connection to prevent pressurized liquid leakage, causing pollution or accidents. ➤ When used in flammable and explosive, and other dangerous environments, install safety isolation grills as required, and cable wiring needs to be sealed and reliable. ➤ Tighten the wiring box cover before powering it to ensure that the inner cavity of the wiring box is isolated from the environment. 						